

FEORI

THE FUTURE OF THE CLEANING



TECHNICAL DATA

DATI TECNICI



60HZ / 220V


50HZ / 400V

DRUM		CESTO		FEORI 50		FEORI 20	
Capacity		Capacità di carico	Lbs	50	Kg.	50	
Volume		Volume Cesto	CuFt	14	Lt	14	
Diameter		Diametro Cesto	in.	39,4	mm	39,4	
Depth		Profondità	in.	20	mm	20	
Wash Speed		Lavaggio	RPM	20-50	RPM	20-50	
Extract Speed		Centrifuga	RPM	300-600	RPM	300-600	
Door Diameter		Diametro Boc.di Carico	in.	20	mm	20	
TANKS		SERBATOI					
1° Tank		Serbatoio 1	UG	29	Lt	29	
2° Tank		Serbatoio 2	UG	44	Lt	44	
POWER		POWER					
Wash Motor		Motore Centrale	Kw	5,5	Kw	5,5	
Water Pump		Pompa Acqua	Kw	0,9	Kw	0,9	
Fan Motor		Ventilatore	Kw	3	Kw	3	
Refrigeration		Frigo	Kw	5,8	Kw	5,8	
Injection Pump (Each)		Pompa Peristaltica (Cad)	Kw	0,01	Kw	0,01	
CONNECTIONS		COLLEGAMENTI					
Air Compressor		Aria Compressa	Ø	1/4"	Ø	1/4"	
Water Inlet		Entrata Acqua	Ø	1"	Ø	1"	
Water Outlet		Uscita Acqua	Ø	1 1/2"	Ø	1 1/2"	
Steam Inlet		Entrata Vapore	Ø	1/2"	Ø	1/2"	
WEIGHT with Safety Tray		PESO con vasca					
Net		Netto	Lbs	2888	Kg.	1310	
With Water		Con Acqua	Lbs	3521	Kg.	1597	
DIMENSIONS		DIMENSIONI					
Height With Fan		Con Ventilatore	in.	89,4	mm	2270	
Minimum Height		Altezza Minima	in.	79,5	mm	2019	
Width		Larghezza	in.	53,5	mm	1358	
Depth		Profondità	in.	69,6	mm	1767	
DYNAMIC CHARGE		CARICO DINAMICO					
Charge To The Floor			Lbs/ft ²	407,6	Kg/m ²	1315	

Data subject to change without notice / La ditta si riserva la facoltà di variare i dati senza preavviso.

STANDARD FEATURES:

- "Spin Cleaning"™ Washing Technology
- Refrigerated Water Cooler
- High Volume Refrigerated Tank Cooler
- Microprocessor with Manual Operation
- Vortex Drying System
- 4 peristaltic detergent pumps
- Oversized loading door
- Containment tray
- Sight glass on recovery head for inspection and maintenance
- High quality stainless steel construction
- Stainless steel tanks
- Direct tank soap injection

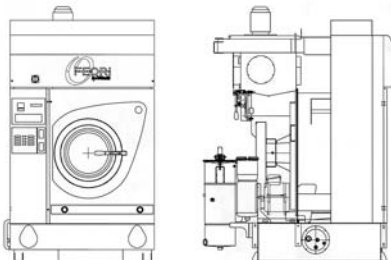

Distributed by

ECO DRY of AMERICA

Division of Fimbatic
 11314 East Main Street - Huntley, IL 60142
 Tele: 847-515-2345 - Fax: 847-515-2444
 e-mail: EcoDryofAmerica@aol.com